
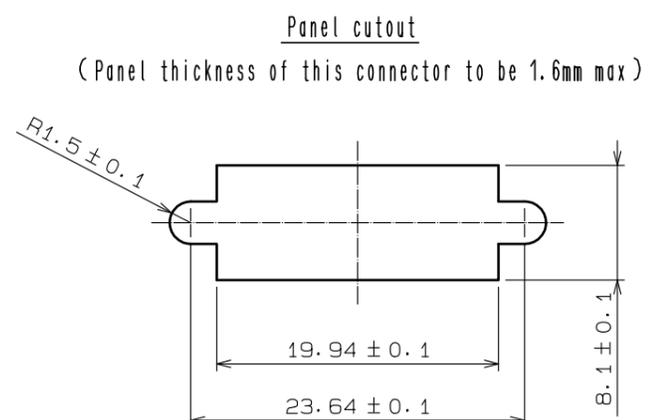
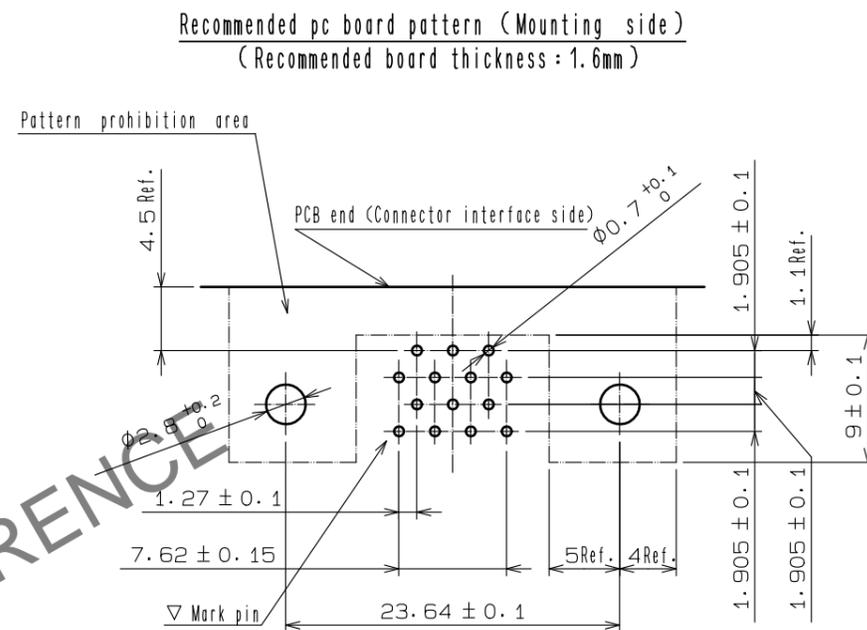
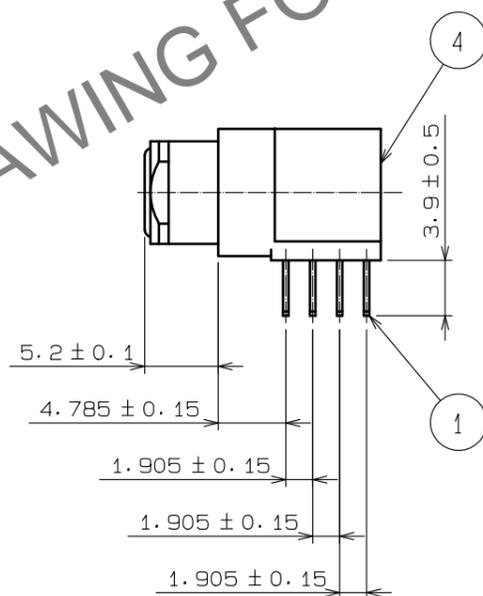
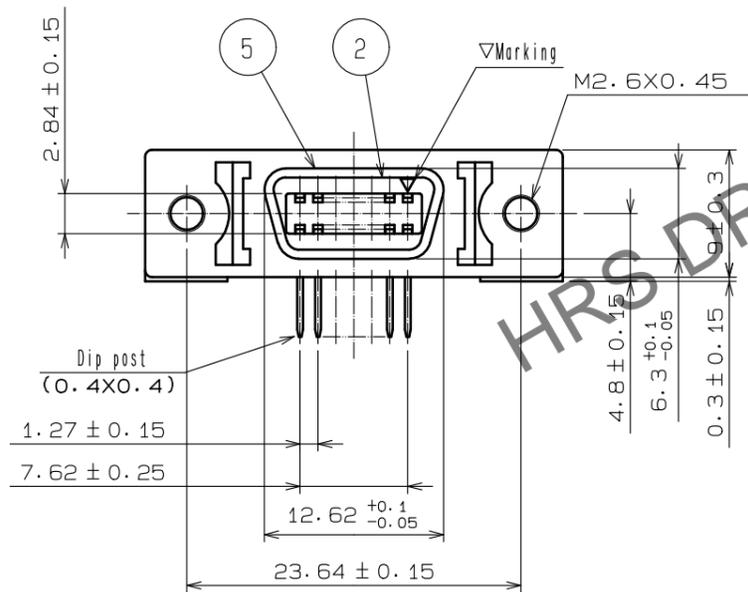


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

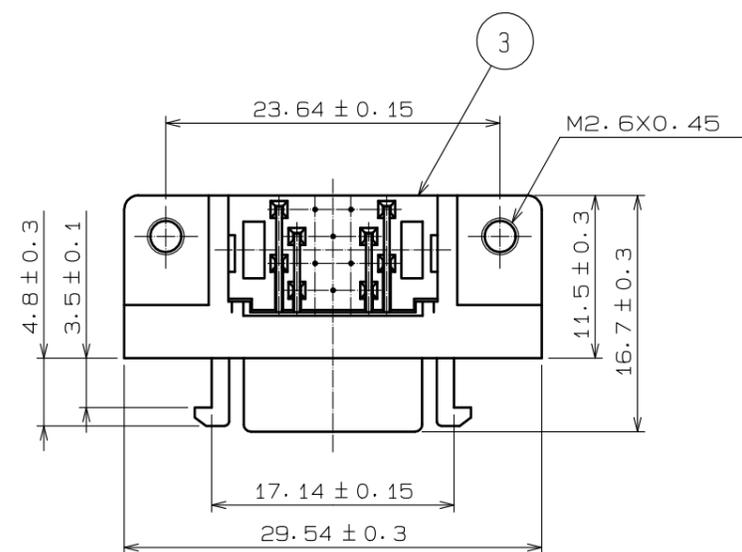

3	PBT	Black UL94V-0	5	Steel	Over plating : Nickel 1 μm min Under plating : Copper 5 μm min
2	PBT	Black UL94V-0	4	Zinc alloy die casting	Over plating : Nickel 2 μm min Under plating : Copper 10 μm min
1	Phosphor bronze	Contact area : Gold 0.3 μm min. Lead area : Gold 0.03 μm min. Under plating : Nickel 2 μm min.			
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
UNITS		SCALE	COUNT	DESCRIPTION OF REVISIONS	
mm		2 : 1		DESIGNED	CHECKED
<b>HRS</b> HIROSE ELECTRIC CO., LTD.		APPROVED : NM. NISHIMATSU 18.01.16	DRAWING NO. EDC-040385-50-02		DATE
		CHECKED : NM. NISHIMATSU 18.01.16	PART NO. DX10M-14S(50)		
		DESIGNED : MO. SHIMOYAMA 18.01.16	CODE NO. CL230-5000-6-50		
		DRAWN : MT. YASUDA 18.01.16			1/1