


Mar.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

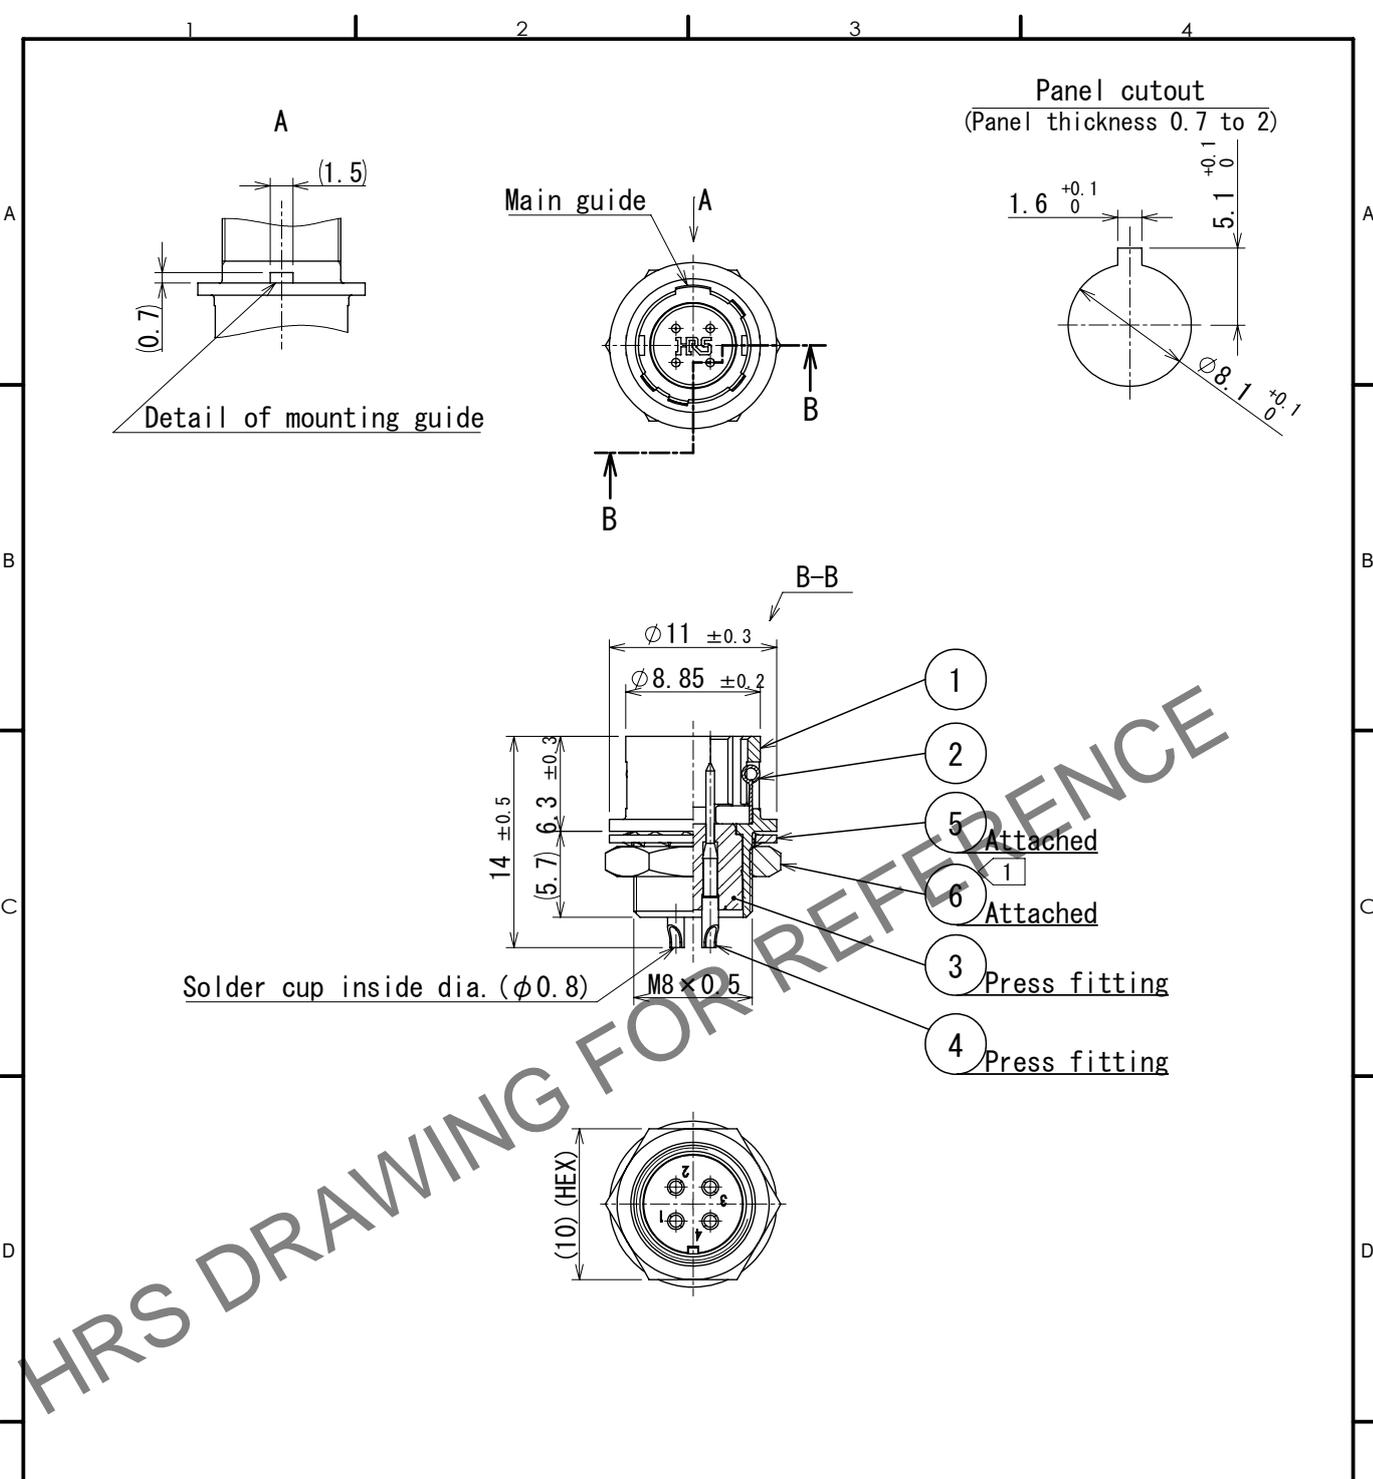

Note ① The recommended clamp torque of Ref.No. ⑥: 1.5N · m.
 ▲ Loctite 243 , Loctite or equivalent apply to prevent Ref.No. ⑥ from loosening.

▲ CAD change

3	Polyamide	(Black) UL94V-0	6	Brass	Nickel plating
2	Stainless steel		5	Phosphor bronze	Nickel plating
1	Zinc alloy	Matte finish nickel plated	4	Brass	Silver plating 2μm min.
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS

UNITS mm 	SCALE 2:1 	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
		2	DIS-C-00019275	HY. KISHI	HY. KOBAYASHI	2025. 02. 20
HIROSE ELECTRIC CO., LTD.	APPROVED :	MO. SATOH	2005. 12. 10	DRAWING NO. EDC-020539-73-73		
	CHECKED :	EJ. KUNII	2005. 12. 09	PART NO. HR10A-7R-4P (73)		
	DESIGNED :	HS. NAGANO	2005. 12. 06	CODE NO. CL0110-0306-6-73		
	DRAWN :	TO. HORII	2005. 11. 08	1/1		