

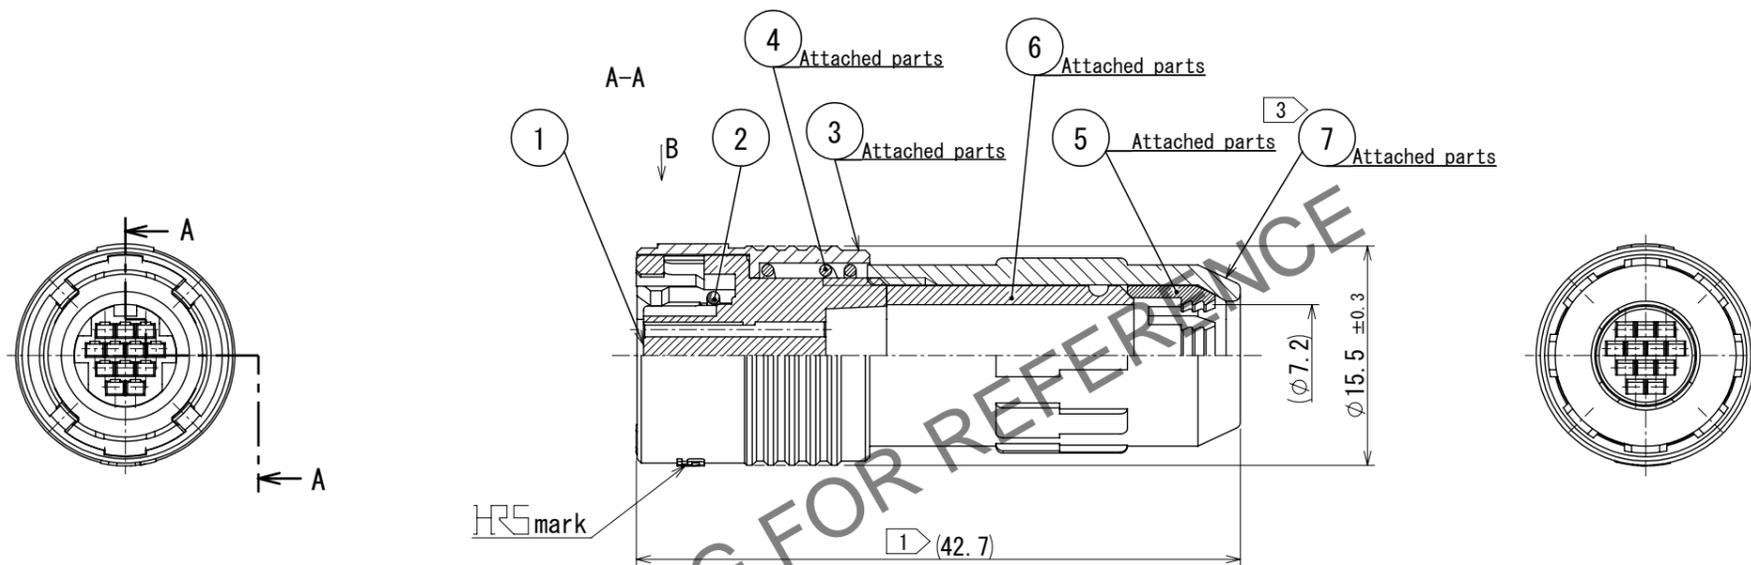


Oct.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

Life size(1:1)

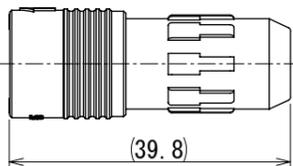

B (5 : 1)

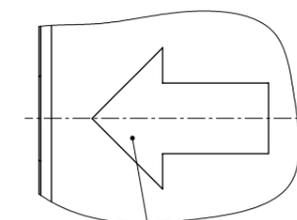

Mating mark (white)

- Notes
- ① Total length becomes 39.8 ± 1 when Ref. No. ⑦ is screwed into Ref. No. ① completely.
 - ② Applicable crimping contact: HR30-SC-211
 - ③ (Applicable wire: 26-30 AWG wire jacket diameter: $\phi 1$ MAX)
 Applicable crimp contact extraction tool: HR30-TP
 The recommended clamp torque of Ref. No. ⑦ to be 0.45 to 0.5N · m.
 To prevent loosening, apply LOCTITE 263 and LOCK PRIMER 7649 manufactured by HENKEL JAPAN Co., Ltd. according to the Loctite Coating Procedure Manual (ETAD-C0151-00).
 Spacer for assembly is available HR30-8P-T02.
 Table for assembly is available HR30-7P-12SC-T01.
 - 4 The cable pull and twisting strength, waterproof tightness and other characteristics may differ, depending on the cable structure, please confirm before the use.
 - 5 The assembly this product applies to the manual ETAD-C0509-00.

△ CAD change

NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS
4	Stainless steel			7	Polyphenylene sulfide	(Black)	UL94V-0
3	Polybutylene terephthalate	(Black)	UL94V-0	6	Chloroprene rubber	(Black)	
2	Silicone rubber	(Red)		5	Polyacetal	(Natural, Milky white)	
1	Polyphenylene sulfide	(Black)	UL94V-0				

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2:1	③ 1	DIS-C-00019296	KS. TAKAHASHI	TP. KOMATSU	2025.02.26

HIROSE ELECTRIC CO., LTD.	APPROVED : MR. YOSHIDA	2005.01.05	DRAWING NO. EDC-112153-71-71 PART NO. HR30-7P-12SC (71) CODE NO. CL0130-0014-5-71
	CHECKED : MO. SATOH	2005.01.05	
	DESIGNED : YH. YAMADA	2005.01.05	
	DRAWN : YH. YAMADA	2005.01.05	